

# Cobra

## In Ground



Traffic Spike System

1130.100



1130.100  
In-Ground  
3' (914mm)

1160.100  
In-Ground  
6' (1829mm)

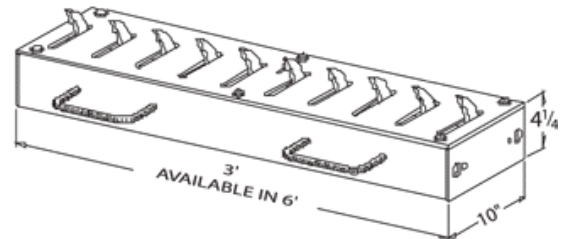

Unrestricted Traffic in Free Direction

Discourages Wrong Way Traffic

In-Ground – Mounts Flush to Road Surface


### Unparalleled Features in the Industry

- Top Plate Mounted Components
- Durable Stainless Steel Spring
- Heavy Duty Steel Construction
- Reliable Zinc Plated Moving Parts
- Positive Stop Eliminates Wear
- Specially Engineered Teeth
- Built-in Latch Down

### Benefits to You

- Virtually Maintenance Free/Easier Cleaning
- Trouble Free Operation
- Durable Spring Loaded Teeth with Counter-Balanced Back-Up
- Corrosion Prevention
- Modular Style Provides Design Flexibility
- Eliminates Tire Damage in Unrestricted Direction
- No Added Cost

Easy Installation Instructions Provided Two-Year Limited Warranty

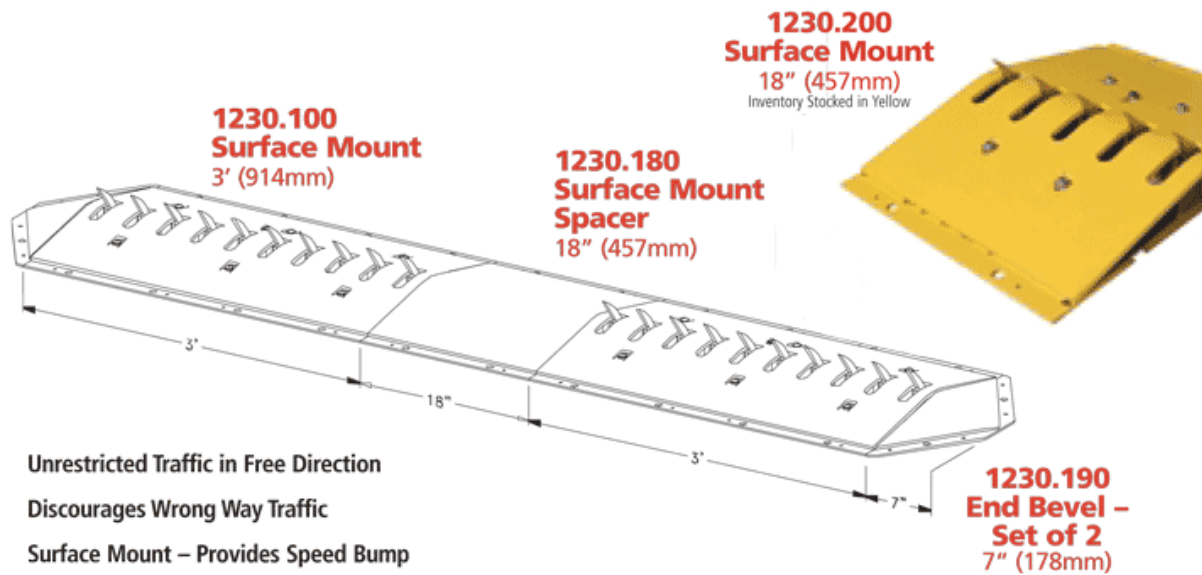

## COBRA Traffic Spike System

### COBRA IN-GROUND TRAFFIC SPIKE SYSTEMS

ITEM#	PRODUCT DESCRIPTION	LBS	KGS
1130.100	3' (914mm) COBRA In-ground Traffic Spike Section –	80	36
1130.120	3' (914mm) COBRA In-ground Traffic Spike Section – Galvanized	80	36
1130.150	3' (914mm) COBRA In-ground Traffic Spike Section – Non-Penetrating Teeth	80	36
1130.170	3' (914mm) COBRA In-ground Traffic Spike Section – Non-Penetrating Teeth - Galvanized	80	36
1160.100	6' (1829mm) COBRA In-ground Traffic Spike Section –	165	75
1160.120	6' (1829mm) COBRA In-ground Traffic Spike Section – Galvanized	165	75
1160.150	6' (1829mm) COBRA In-ground Traffic Spike Section – Non-Penetrating Teeth	165	75
1160.170	6' (1829mm) COBRA In-ground Traffic Spike Section – Non-Penetrating Teeth, Galvanized	165	75

### COBRA SURFACE MOUNTED TRAFFIC SPIKE SYSTEMS

1230.100	3' (914mm) COBRA Surface Mount Traffic Spike Section	100	45
1230.120	3' (914mm) COBRA Surface Mount Traffic Spike Section – Galvanized	100	45
1230.150	3' (914mm) COBRA Surface Mount Traffic Spike Section – Non-Penetrating Teeth	100	45
1230.170	3' (914mm) COBRA Surface Mount Traffic Spike Section – Non-Penetrating Teeth, Galvanized	100	45
1230.180	18" (457mm) COBRA Surface Mount Spacer	50	23
1230.182	18" (457mm) COBRA Surface Mount Spacer – Galvanized	50	23
1230.190	7" (178mm) COBRA End Bevel - Set of two (Fits all COBRA Surface Mount Units)	26	12
1230.192	7" (178mm) COBRA End Bevel Galvanized – Set of two (Fits all COBRA Surface Mount Units)	26	12
1230.200	18" (457mm) COBRA Surface Mount Traffic Spike Section – Yellow	51	23



## WARNING SIGNS

- 1410.100 GUARDIAN Warning Sign, Lighted
- 1414.100 GUARDIAN Warning Sign, Reflective

## WARNING SIGN POSTS

- 1416.100 GUARDIAN Warning Sign Post - In-ground Set - 6' (1829mm)
- 1416.110 GUARDIAN Warning Sign Post - Surface Mount - Bolt to Concrete - 4' (1219mm)

## EPOXY

- 1425.100 Epoxy - Standard Set - 1 Gallon

## SPEED BUMPS

- 1430.160 2" X 10" X 6' Standard Speed Bump - Yellow

## DELINEATOR

- 1435.100 4" X 4" Yellow Traffic Delineator

**\*Warning** Guardian Traffic Spike Systems are engineered to be used at a maximum speed of 5 miles per hour. Vehicles must pass over the unit so that the tire is parallel to the teeth and not at any angle. Traffic Spike Systems require Warning Signs. Locating and installing a Traffic Spike System incorrectly or not using warning signs invalidates any implied or real warranty.

All specifications subject to change at any time without notice

