

**MODEL 12360
KING COBRA™
HEAVY DUTY
SURFACE MOUNT
TRAFFIC SPIKES**

- *INDUSTRIAL*
- *INSTALL ON
ASHALT OR
CONCRETE*

3' (914 mm) Sections
132 lbs.

LOAD RATED

20 Tons or 40,000 lbs.
Per Single Axle Load

MODELS

- 12360.100 Safety Red
- 12360.120 Galvanized
- 12360.130 Powder Coated

System Requirements

- Maximum Speed 5 mph
- Tires must pass over the unit so that the tire is parallel to the teeth and not at an angle
- Warning Signs Required
- Locating & installing a Traffic Spike incorrectly or not using warning signs voids any warranty


1 Year Limited Warranty

*THE ONLY CHOICE...For your traffic control needs.
Serving our customer worldwide since 1985.*

**KING
COBRA™**



- **Unrestricted Traffic in Free Direction**
- **Discouraged Wrong Way Traffic**
- **Surface Mount—Provides a Speed Bump**

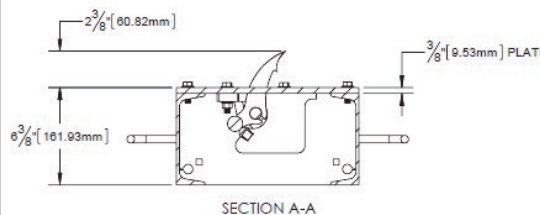

Guardian's KING COBRA™ Traffic Spike System is designed and engineered to allow traffic to proceed freely in one direction only.


The KING COBRA™ System's main function is to prevent vehicles from proceeding through controlled entry locations by puncturing tires while allowing unrestricted passage from vehicles traveling in the allowable direction.

The KING COBRA™ Traffic Spike System provides extremely effective and economical one-way directional, unmanned traffic control. The KING COBRA™ is manually activated and engineered with spring loaded teeth along with a counter-balanced technology that provided a reliable and low maintenance.

GUARDIAN reserves the right to make changes to specifications at any time

Domenic Caruso, President
(215) 266-0707

dcaruso@falconeyeglobal.com
www.falconeyeglobal.com



*"Top-Down Design – NOT Bottom-Up"
For Easy Maintenance*

**MODEL 12360
KING COBRA™
HEAVY DUTY
SURFACE MOUNT
TRAFFIC SPIKES**

Specifications

3/8" Hot Rolled Steel Top Plate

Curved Tooth, Fishhook
Disabler

Durable Stainless Steel Springs

Heavy Duty Steel Construction

Positive Stop Eliminates Wear

Specially Engineered Teeth

Built-In Latch Down Device

Built-In Sound Dampeners

Installation

Epoxy – 14250.100

3/8" LDT Lag Bolts

**Bolts not to be used on
Asphalt Surface*

Available Options

Safety Red or Yellow

Galvanized or Powder Coated

Warning Signs

Reflective

Lighted

Solar

English or Spanish



Features and Benefits



Virtually Maintenance Free



Trouble Free Operation

*Durable Spring Loaded Teeth and
Counter Balanced Back-Up*

Corrosion Prevention

Modular Style Provided Design Flexibility

*Eliminates Tire Damage in Unrestricted
Direction*

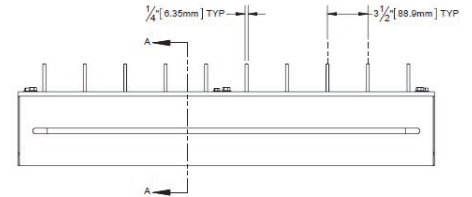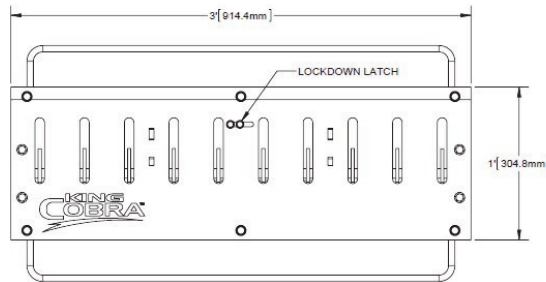

Unparalleled Features in the Industry

- *Top Plate Mounted Components*
- *Durable Stainless Steel Springs*
- *Heavy Duty Steel Construction*
- *Reliable Zinc Plated Moving Parts*
- *Positive Stop Eliminates Wear*
- *Specially Engineered Teeth*
- *Built-In Latch Down Device*

Optional End Bevels

(Sold in Pairs)

12360.190



**Domenic Caruso, President
(215) 266-0707**

dcaruso@falconeyeglobal.com
www.falconeyeglobal.com

