


MANUAL TRAFFIC SPIKES

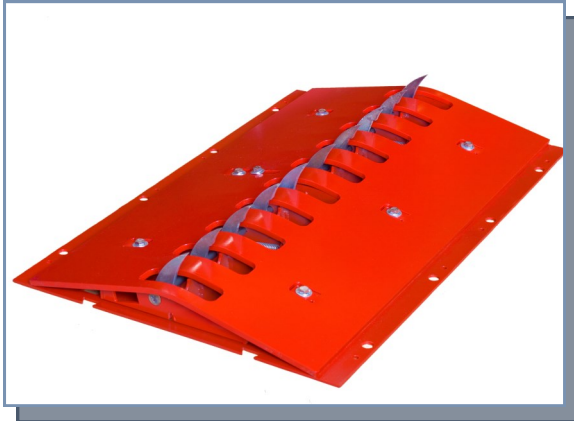

MODEL 12300—3FT

1 Rated 15,000 lbs per single axle load
1/4" Steel Top Plate

MODEL 12360—3FT

Rated 45,000 lbs per single axle load
3/8" Top Plate

SAFETY REQUIREMENTS

- ⇒ Maximum 5 mph
- ⇒ Tires must pass over the unit so that the tire is parallel to the teeth and not at an angle
- ⇒ Warning Signs Required
- ⇒ Locating & installing a traffic spike system incorrectly or not using warning signs voids any warranty



COBRA™ SURFACE MOUNT

The COBRA™ can be used in all commercial and residential applications. This product is easy to install on asphalt and concrete surfaces. The COBRA™ unit also acts as a speed bump.

FEATURES & BENEFITS

1 Year Limited Warranty

- ◇ Heavy Duty Steel Construction
- ◇ Counter Balanced & Spring Loaded System
- ◇ Reliable Zinc Plated Moving Parts
- ◇ Positive Stop Eliminates Wear
- ◇ Specially Engineered Curved Teeth with Fish-Hook Disabler
- ◇ Built-In Latch Down Device
- ◇ Designed Top-Down for Easy Maintenance
- ◇ Modular Style For Design Flexibility
- ◇ Restricts Tire Damage to Wrong Way Traffic

